

# UniSG: Unifying entity-component-systems, 3D & learning scenegraphs with GNNs for generative AI

Paul Zikas

paul@oramavr.com

ORamaVR, University of Geneva  
Switzerland

Mike Kentros

mike@oramavr.com

ORamaVR, University of Crete,  
FORTH - ICS  
Greece

Dimitris Aggelis

dimitris.aggelis@oramavr.com

ORamaVR, University of Crete,  
FORTH - ICS  
Greece

Antonis Protopsaltis

antonis.protopsaltis@oramavr.com

ORamaVR, University of Western  
Macedonia  
Greece

Manos Kamarianakis


manos.kamarianakis@oramavr.com

ORamaVR, University of Crete,  
FORTH - ICS  
Greece

George Papagiannakis

george.papagianakis@oramavr.com

ORamaVR, University of Crete,  
FORTH - ICS  
Switzerland

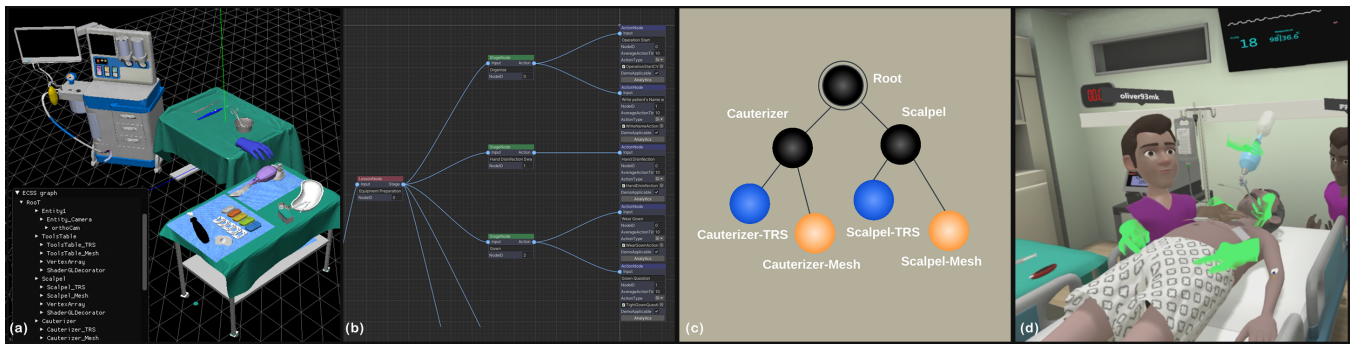

**Figure 1.** The proposed universal scenegraph unifies (a) the 3D scenegraph with Entity-Component-Systems, (b) the behavioral learning scenegraph, and (c) the deriving GNN graph, towards (d) generative AI for a VR training session.

**Keywords:** Generative AI, Graph neural networks, 3D scenegraph, behavior embedding

## 1 Introduction

Based on successful pre-trained foundation models, such as GPT, advances in geometric deep learning and Graph Neural Networks (GNNs) [3] democratized and accelerated the generation of static 3D scenes [1], by encapsulating relational patterns in the topology of a graph as node or link features. These scenes are usually based on 3D scenegraphs (3D-SG), a well formulated data structure. To create an effective VR learning experience [7], authors also need to embed *behavior* (e.g. interaction with the 3D scene and events triggered when specific requirements are met). One way to accomplish this is via the Lessons-Stages-Actions (LSA) [6] graph-based structure.


However, to use all the encapsulated data as input to a GNN, a digestible graph needs to be derived and maintained, leading to a potential bottleneck of maintenance three graph structures. In such a context, transformations between these graphs are mandatory, resulting in a very complex pipeline.

We envision a no-code solution that generates new nodes, edges and features reflecting the creation of 3D models,

scenes and even new behavioral steps through GNNs. To this end, we propose a novel *Universal Scenegraph* (UniSG), that unifies entity-component-systems, 3D and learning scenegraphs with GNNs to empower generative AI, and facilitate the creation of 3D scenes with embedded behavior, alleviating existing bottlenecks.

## 2 Our approach

The proposed UniSG is a heterogeneous graph based on the Entity Component System in a Scenegraph (ECSS) model [5], containing diverse component types, that store both geometrical and behavior related information. Specifically, UniSG involves *info* components, holding the number of node types among its children, *TRS* components, containing a vector (of size 16), produced by flattening the respective transformation matrix, as well as *mesh* components, storing a feature vector (of size 1024) of the mesh, rather than vertex locations. This may be derived by any suitable encoder, in our case AtlasNetEncoder [2], after a Poisson sampling process; this approach allows a fixed-size representation form, regardless of the complexity of the initial mesh. The resulting vector can be decoded using AtlasNetDecoder to obtain a point cloud, subsequently reconstructed to a triangulated mesh.

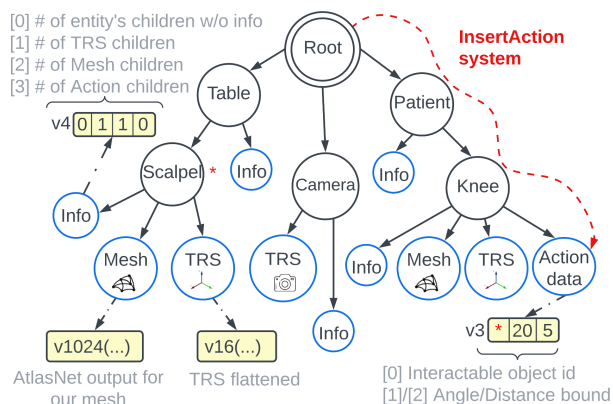

**Figure 2.** An example of the UniSG. Black nodes represent *entities* of the ECS architecture, whereas blue nodes are *components* (e.g., transformations, meshes, actions, etc.), that encapsulate data. *Systems* (red lines) digest components’ data and perform specified tasks, while traversing the graph. In this case, the *InsertAction* system checks if the scalpel’s placement on the knee is within the specified spatial bounds, when visiting the *ActionData* component. Graph features, in yellow, are provided in vector form, digestible by GNNs.

To embed behavior, UniSG introduces *ActionData* components, that store data for the desired behavioral functionality, along with suitable *Action* systems that digest them. These ECS components and systems are able to represent actions that the user must perform in the context of a training scenario, similar to the ones stored in the LSA data structure [6]. The *ActionData* nodes have common structure for all actions and store data and conditions related to a specific action, in vector form. The diverse *Action* systems constantly traverse the graph (or part of it), and validate if the imposed conditions are met. An example of how an “*Insert*” action could be implemented is shown in Figure 2.

In order to unify diverse data types under a single form, we merged various file formats otherwise used into one master file; we used Pixar’s Universal Scene Description (USD) format, as it is highly versatile, while also allowing the addition of more complex features, e.g.VR-Recording [4].

Our approach has been tested on a classification task, consisting of 2 Convolutional layers, that apply the GraphSAGE convolution on the input graph. A dataset of 100 3D scenes was created, through a random noise-based data augmentation via perturbation of the components of two UniSG-modelled, behaviour involving, 3D scenes: a surgical operating room (OR) and a living room. Using a 70/30 split for training/testing, we trained for 10 epochs and achieved 100% accuracy on both splits, utilizing GNN attention mechanism.

### 3 Conclusions and future work

We presented UniSG, a unified graph easily digestible from GNNs, that embeds behavior data, overcoming the challenge of transforming a 3D-SG when performing generative tasks.

Towards generating new nodes, edges or features, in our unified graph, we plan to train our GNN architecture with a large corpus of medical oriented data that involve content and behavior (scenes, models or even parts of educational curricula), directly acquired from MAGES SDK [7], in the form of UniSGs, and get closer to our ultimate target, a generative AI no-code VR authoring platform. Lastly, we will explore integrating Auto-GPT in the proposed framework to fully automate the complex and multi-step VR simulation authoring pipeline.

### Acknowledgments

The project was partially funded by the National Recovery and Resilience Plan “Greece 2.0” - NextGenerationEU, under grant agreement No ΤΑΣΦΡ-06378 (REVIREs-Med).

### References

- [1] Helisa Dhamo, Fabian Manhardt, Nassir Navab, and Federico Tombari. 2021. Graph-to-3d: End-to-end generation and manipulation of 3d scenes using scene graphs. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 16352–16361.
- [2] Thibault Groueix, Matthew Fisher, Vladimir G. Kim, Bryan C. Russell, and Mathieu Aubry. 2018. A Papier-Mâché Approach to Learning 3D Surface Generation. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- [3] Weihua Hu, Bowen Liu, Joseph Gomes, Marinka Zitnik, Percy Liang, et al. 2020. Strategies for Pre-training Graph Neural Networks. In *International Conference on Learning Representations*.
- [4] Manos Kamarianakis, Ilias Chrysovergis, Mike Kentros, and George Papagiannakis. 2022. Recording and Replaying Psychomotor User Actions in VR. In *ACM SIGGRAPH 2022 Posters*. Association for Computing Machinery, New York, NY, USA, Article 30, 2 pages.
- [5] George Papagiannakis, Manos Kamarianakis, Antonis Protopsaltis, Dimitris Angelis, and Paul Zikas. 2023 (to appear). Project Elements: A computational entity-component-system in a scene-graph pythonic framework, for a neural, geometric computer graphics curriculum. In *Eurographics 2023 - Education Papers*. The Eurographics Association.
- [6] Paul Zikas, George Papagiannakis, Nick Lydatakis, Steve Kateros, Stavroula Ntoa, Iliia Adami, and Constantine Stephanidis. 2020. Immersive visual scripting based on VR software design patterns for experiential training. *The Visual Computer* 36 (2020), 1965–1977.
- [7] Paul Zikas, Antonis Protopsaltis, Nick Lydatakis, Mike Kentros, et al. 2023. MAGES 4.0: Accelerating the world’s transition to VR training and democratizing the authoring of the medical metaverse. *IEEE Computer Graphics and Applications* 43, 2 (2023), 43–56.